

Low Velocity Ballistic Cannon

P/N: 1000_05_LVC01

The Cadex low velocity ballistic cannon is designed and manufactured to test face shields, eyewear protectors and others. The system complies with SNELL, ANSI Z87, EN 168, AS/NZS and other standards.

DIMENSIONS:

Length: 203.83 cm / 80.25 in

Width: 94.95 cm / 37.38 in

Height: 115.57 cm / 45.5 in

REQUIREMENTS:

Power: 110v/220v - 50/60 Hz


Constant air supply: 100 psi at 15 cfm

FEATURES:

- 1. Touchscreen controller
- Removable velocimeter (timegate) for periodical calibration
- 3. Interchangeable barrels
- 4. Adjustable table from x, y, z and rotating headform holder
- 5. Emergency stop button
- 6. Polycarbonate walls
- Crosshair laser for impact positioning

AVAILABLE CALIBERS

- 0.15 cal
- 0.22 cal
- 6mm
- 0.25 cal

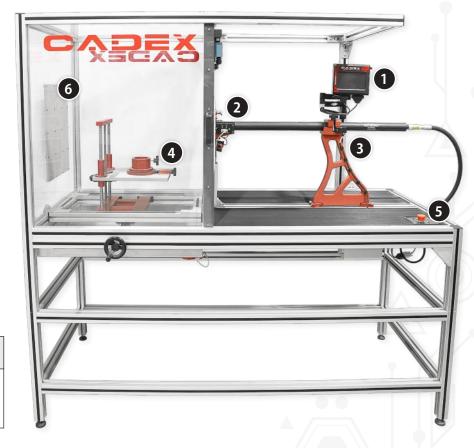



Touchscreen controller



Adjustable table and rotating headform holder



Velocimeter (timegate)